



UNDERGROUND DRILLING EQUIPMENT AND TOOLS

www.bddrill.com.au / www.bddrillgf.com.au



Black Diamond Drilling Services Group

ABOUT US

Black Diamond Drilling Services Australia/Goldfields



WA Headquarters: 52 Distinction Road, Wangara WA 6065

Tel: +61-08-6365-6550 **Email:** sales@bddrill.com.au **Web:** www.bddrill.com.au

Kalgoorlie-Boulder: 2 Brooks Way, Kalgoorlie, WA, 6430

Tel: +61-08-9021-8478 **Email:** admngf@bddrill.com.au **Web:** www.bddrillgf.com.au

Black Diamond Drilling Tools Canada Inc.



Sudbury Headquarters: 1899 Lassalle Blvd, unit 6, Sudbury, On, Canada, P3A-2A3

Tel: +1-705-560-5888 **Email:** sales@bddrill.ca **Web:** www.bddrill.ca

Black Diamond Drilling Tools USA LLC.



New Hampshire Headquarters: 131 Daniel Webster Hwy, #426 Nashua, NH 03060

Tel: +1-978-319-8000 **Email:** sales@bddrill.us **Web:** www.bddrill.us

Black Diamond Mongolian Ops (TD Equipment)

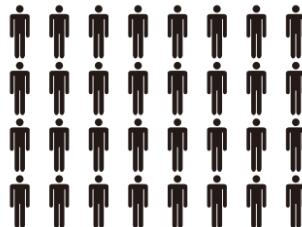


Ulan Bator Headquarters: Maison Center 403, Beijing Street,

Sukhbaatar District, Ulaanbaatar, Mongolia

Tel: +976-7773-1333 **Email:** support@tdequipment.mn

**1000
EMPLOYEES**



**300,000
M² OF
FACTORY**



ANNUAL PRODUCTION

DTH hammer: over 20,000 units

Maximum size for hammer: 609mm(24")

Drill bit: 250,000 pcs

Maximum size for drill bit: 1000mm(39-1/3")

30 days for production on any quantity

Black Diamond Drilling Services Australia Pty Ltd known as "BD DRILL" is a privately owned Australian Company which services the Mineral exploration, Mining, Water well and Geotechnical sectors of the drilling industry.

BD DRILL is a subsidiary of Changsha Heijingang Industrial Ltd. Co., the head office is located in Perth, Western Australia and supports regions in Australia and the overseas market.

BD DRILL has established a reputation for outstanding commitment to product quality, innovation and most importantly customer service.

Our extensive product range covers DTH equipment (conventional, reverse circulation, bits, strings and rigs), Top hammer and a comprehensive selection of various drilling products (diamond bit, drag bit, tricone bits, drilling grease and other consumables.)

USE OF LOCAL (AUSTRALIAN) CONTENT

Black Diamond Drilling Australia is a Western Australian fully owned and operated company. Our manufacturing facilities are based in Australia and China with a comprehensive Quality Control system in place. The R & D for Black Diamond Australia is completed right here by our highly experienced staff of which 80% are local Australians.

We utilise the service of a Local Queensland Indigenous company to be our distributor through the East Coast of Australia. Please see attached policies for local engagement, Quality, Indigenous Engagement, Australian Participation.

We use many local suppliers for training, logistics, I.T. etc.

Local Engagement

- Sponsorship and Advertising at Optus Stadium with the West Coast Eagles.
- Major Sponsor for the Annual Kalgoorlie Desert Race.
- Donations to several Cancer and Children's Charities.



Member of

- ADIA Australian Drilling Industrial Association



- The Australian Drilling Industry Association (ADIA) is the peak body representing the drilling industry nationally. Its membership is made up of individuals and companies committed to improving the skills, safety and overall professionalism of the drilling industry. It is the voice of its members, providing collective representation on matters that affect them and their businesses.

- AMEC Association of Mining and Exploration Companies



- AMEC is an industrial association representing over 375 member companies from all around Australia. Their members are explorers, emerging miners, producers and a wide range of businesses and service providers working in and for the mining industry. AMEC is a leading voice of Australia's mineral exploration and mining industry.

Engagement with Indigenous Australians

iCutter Industries are an Australian owned and operated indigenous business. iCutter services the drill and blast sector on the East Coast of Australia from their base in Mackay Queensland. They have over 20 years of experience within the exploration and mining drilling divisions. BD Drill has a well-established partnership with iCutter Industries for the supply of hammers, bit roller stabilisers, shock subs and deck bushes.

BD Drill chose to partner with iCutter Industries because of the shared values and dedication to the Australian environment. BD Drill continues to create a culture where ideas flourish and a difference is made. We work together to support the indigenous business sector.





CHINESE FACTORY

Founded on April 30 1999, Changsha Heijingang Industrial Co. Ltd(HJG) is a famous privately operated enterprise specialised in researching and manufacturing rock drilling equipment and pneumatic tools. The company has rich scientific research and production experience. It produces high quality rock drilling products by using high quality raw material, utilising advanced manufacturing technology and imposing strict quality inspection. The products made by HJG are being sold well all over China and exported to more than 50 countries such as America, France, Australia, Canada, Brazil, South Africa, Malaysia, South Korea and so on. It has gained high praise and a good reputation all over the world.

Changsha Heijingang Industrial is located in Lei Feng, Wangcheng, Hunan, with a land area of 300,000 m² and workshop space of 220,000m².Currently we have more than 1000 employees and we are equipped with a wide range of advanced equipment required for manufacturing rock drilling machines and pneumatic tools. We have designed and manufactured the following products: the most advanced high air pressure DTH hammer in China, various kinds of threaded drill bits, reverse circulation hammers and bits, shank adapters and coupling sleeves, new style wells geothermal drilling rig, open air blasthole drilling rig, all kinds of tool joints and drill pipes as well a spare parts for drill rigs.

www.bddrill.com.au





AUSTRALIAN MADE PRODUCTS

The Australian Made certification is a distinctive and highly regarded symbol that signifies a product's origin in Australia. This certification assures consumers that the marked item has undergone stringent checks to ensure it meets the country's high-quality and safety standards. This iconic green and gold kangaroo logo not only serves as a point of pride for Australian manufacturers but also assists consumers in making informed choices, supporting the local economy, and fostering a sense of trust in the products they purchase.

Black Diamond is licensed by Australian Made Campaign Limited to use the Australian made logo.

Currently we have 10% of our SKU produced locally, we are aiming to raise this figure to 30% in 5 years.



Currently we have 10% of our SKU produced or purchased locally, and our goal is to raise this figure to 30% within 5 years.



Some of our locally made products include:

Rig Baskets



Lifting Bails



Check Valves



Deck Bushes



Hammer Trailer



Seals and Springs



RECOMMENDED SAFETY PROCEDURES

The mining industry continues to demand even higher levels of safety and productivity. In order to meet these requirements, we work continuously to develop even safer products and to produce comprehensive manuals enabling safer and effective use of our products.



IT'S ALL ABOUT EVERYONE'S HEALTH

Helping you to ensure a safer workplace and healthier workforce is of the utmost importance to us. The well-being of any person coming into contact with our equipment is paramount. Therefore, we strive to identify and assess potential risk factors that could threaten the health of you and your employees.

All the products in our catalogue are designed to meet safety requirements.

DRESS RIGHT FROM HEAD TO TOE

You must always wear appropriate personal protective equipment (PPE). This is what we strongly recommend, to help avoid injury:

- Safety helmet
- Hearing protection
- Safety glasses
- Protective high visibility clothing
- Respiratory protection
- Safety boots
- Any site-specific PPE as required.

BE AWARE OF ALL SAFETY PROCEDURES

We ask that you start by obeying all instructions given. Never work under an unsupported roof or close to potential pinch point locations. Beware of the potential hazards of a loose roof and ribs and scale down roof ribs prior to bolting. It is important to bolt early in the mining process – as soon as safely and practically possible.

Safe work procedures should incorporate inspection before the machine operates and also through regular monitoring based upon mining conditions, safety and management systems. Workers should be provided with safety information, instruction and training on transportation, installation, operational care and disposal of drilling tools.

MAKE A RISK ANALYSIS BEFORE YOU START

Pay attention to safety when planning all of your work. Before you start, always take your time to go through all operations. Identify any potential risks and take appropriate measures to avoid them. If necessary, seek expert advice on how to help minimize risks. Finally, make sure that you have the right resources to perform all tasks in the safest manner possible.

CATALOGUE GUIDE

Air-Leg and Small Hole Drilling Tools

PAGE 01

Face and Development Drilling Tools

PAGE 09

Production Drilling Tools

PAGE 27

Split Set Driving Tools

PAGE 30

Air-Leg and Hand-Held Rock Drills

PAGE 33



Top Hammer Air Leg and Small Hole Drilling Tools

- H22 Air-Leg Drilling Tools PAGE 02
- R23 Air-Leg Drilling Tools PAGE 06
- R25 Air-Leg Drilling Tools PAGE 07
- R28 Air-Leg Drilling Tools PAGE 08

Air Leg and Small Hole Drilling Tools

Black Diamond Drilling manufactures and supplies world class drill bits tapered and threaded rods and drill steels for Air-Leg and small hole drilling. Using the latest manufacturing equipment and techniques ensures that our products are high strength and wear resistant. The result is an efficient and cost-effective drilling solution.

H22 12° Taper Drilling Tools

Drill Bit	Buttons, mm		Flushing Hole, mm		Angle	Dimensions, D		Part Number	Compatibility
	Front No, Size	Gauge No, Size	Front No, Size	Gauge No, Size		Imperial	Metric		

Cross type bit



-	-	1x6	2x4.5	-	1 1/4"	32mm	THU-HH-TCB32-H22/12	7770-9032-42 90503024 90512643
-	-	1x6.35	2x4.5	-	1 3/8"	45mm	THU-HH-TCB45-H22/12	7770-9045-42 90503069


Button bit



1x7	4x7	1x5	1x5	35°	1 1/8"	28mm	THU-HH-TBB28FF-H22/12	7795-6428-B48 90510695 90516429
1x7	4x7	1x5	1x5	35°	1 3/16"	30mm	THU-HH-TBB30FF-H22/12	7795-6430-B48 90510181
2x7	5x7	2x4	1x4	40°	1 1/4"	32mm	THU-HH-TBB32FF-H22/12	7795-5232-B48 90509650 90509841
2x7	5x8	2x4	1x4	40°	1 3/8"	35mm	THU-HH-TBB35FF-H22/12	7795-5235-B48 90509535
2x7	5x9	2x5	1x5	40°	1 1/2"	38mm	THU-HH-TBB38FF-H22/12	7795-5238-B48 90512658


Drill Rod	Dimensions				Part Number	Compatibility		
	Length		Diameter					
	Imperial	Metric	Imperial	Metric				

Tapered rod, shank 22 x 108, Carburized




2'	610mm	7/8"	22mm	THU-HHTR-H22/610	7870-6106-11 90504832
3'	910mm	7/8"	22mm	THU-HHTR-H22/910	7870-6112-11 90505433
4'	1220mm	7/8"	22mm	THU-HHTR-H22/1220	7870-6118-11 90505434
5'	1600mm	7/8"	22mm	THU-HHTR-H22/1600	
6'	1830mm	7/8"	22mm	THU-HHTR-H22/1830	7870-6124-11 90505436
8'	2440mm	7/8"	22mm	THU-HHTR-H22/2440	7870-6131-11 90505437
10'	3050mm	7/8"	22mm	THU-HHTR-H22/3050	7870-6137-11 90505438

Tapered rod, shank 22 x 108, Hardened



8'	2440mm	7/8"	22mm	THU-H22-2440H	7870-1124-11 90504841
10'6"	3200mm	7/8"	22mm	THU-H22-3200H	7870-1132-11 90504844
13' 1 1/2"	4000mm	7/8"	22mm	THU-H22-4000H	7870-1140-11 90504846
14'5"	4400mm	7/8"	22mm	THU-H22-4400H	7870-1144-11
15'9"	4800mm	7/8"	22mm	THU-H22-4800H	7870-1148-11 90504847
18' 4 1/2"	5600mm	7/8"	22mm	THU-H22-5600H	7870-1156-11 90504848
21'	6400mm	7/8"	22mm	THU-H22-6400H	7870-1164-11 90504849
23' 7 1/2"	7200mm	7/8"	22mm	THU-H22-6400H	7870-1172-11 90504850
26' 3"	8000mm	7/8"	22mm	THU-H22-8000H	7870-1180-11 90504851
28' 10 1/2"	8800mm	7/8"	22mm	THU-H22-8800H	7870-1188-11


Tapered rod, shank 25 x 108, Carburized



14'	4300mm	1"	25mm	THU-H25-4300C	7870-7143-30
-----	--------	----	------	---------------	--------------

H22 11° Taper Drilling Tools

Drill Bit	Buttons, mm		Flushing Hole, mm		Angle	Dimensions, D		Part Number	Compatibility
	Front No, Size	Gauge No, Size	Front No, Size	Gauge No, Size		Imperial	Metric		
Button bit									
	1x5	1x5	2x7	5x7	40°	1 1/4"	32mm	THU-N32-11-H22	7776-4432-B48 90512816
	1x5	1x5	2x7	5x8	40°	1 3/8"	35mm	THU-N35-11-H22	7776-4435-B48 90512818
	1x5	1x5	2x7	5x8	35°	1 7/16"	36mm	THU-N36-11-H22	7776-4436-B48 90509968
	1x5	1x6	2x7	5x8	35°	1 1/2"	38mm	THU-N38-11-H22	7776-4438-B48 90509966
	1x5	1x6	2x8	5x9	35°	1 37/64"	40mm	THU-N40-11-H22	7776-4440-B48 90509962

Drill Rod	Dimensions				Part Number	Compatibility		
	Length		Diameter					
	Imperial	Metric	Imperial	Metric				
11° Tapered rod, shank 22 x 108, Carburized								
	2'	610mm	7/8"	22mm	THU-H22/11-610C	7876-6106-11		
	2 7 1/2"	800mm	7/8"	22mm	THU-H22/11-800C	7876-6108-11 90504864		
	4'	1220mm	7/8"	22mm	THU-H22/11-1220C	7876-6112-11 90504865		
	5'3"	1600mm	7/8"	22mm	THU-H22/11-1600C	7876-6116-11 90500144		
	6'	1830mm	7/8"	22mm	THU-H22/11-1830C	7876-6118-11 90504868		
	6'7"	2000mm	7/8"	22mm	THU-H22/11-2000C	7876-6120-11 90504869		
	8'	2440mm	7/8"	22mm	THU-H22/11-2440C	7876-6124-11 90505441		
	10'	3050mm	7/8"	22mm	THU-H22/11-3050C	7876-6131-11		
	11' 9 1/2"	3600mm	7/8"	22mm	THU-H22/11-3600C	7876-6136-11 90510203		

H22 7° Taper Drilling Tools

Drill Bit	Buttons, mm		Flushing Hole, mm		Angle	Dimensions, D		Part Number	Compatibility
	Front No, Size	Gauge No, Size	Front No, Size	Gauge No, Size		Imperial	Metric		
Button bit									
	2x5	1x5	2x7	5x7	40°	1 1/4"	32mm	THU-N32-7-H22	7788-5232-B48 90512799
	2x4	1x4	2x7	5x7	40°	1 9/64"	33mm	THU-N33-7-H22	7788-5233-B48 90515546
	2x4	1x4	2x7	5x8	40°	1 3/8"	35mm	THU-N35-7-H22	7788-5235-B48 90512922
	2x4	1x4	2x7	5x8	35°	11/2"	38mm	THU-N38-7-H22	7788-5238-B48 90515584


Drill Rod	Dimensions				Part Number	Compatibility		
	Length		Diameter					
	Imperial	Metric	Imperial	Metric				
7° Tapered rod, shank 22 x 108, Carburized								
	8'	2400mm	7/8"	22mm	THU-H22/7-2400C	7888-6124-11 90515483		
	10'6"	3200mm	7/8"	22mm	THU-H22/7-3200C	7888-6132-11 90516583		

H22 6.5° Taper Reaming Tools


Reaming Bit	Buttons, mm		Dimensions, D		Part Number	Compatibility
	Front No. Size	Gauge No. Size	Imperial	Metric		
	2x10	8x11	2 7/16"	62mm	THU-HH-R62FF-H22/6.5	-
	2x11	8x11	3"	76mm	THU-HH-R76FF-H22/6.5	-

Reamer Rod	Dimensions				Part Number	Compatibility		
	Length		Diameter					
	Imperial	Metric	Imperial	Metric				
6.5° Tapered rod, shank 22mm	3'	610mm	7/8"	22mm	THU-HHRR-H22/6.5-610	-		
	4'	1220mm	7/8"	22mm	THU-HHRR-H22/6.5-1220	-		
	6'	1830mm	7/8"	22mm	THU-HHRR-H22/6.5-1830	-		
	8'	2440mm	7/8"	22mm	THU-HHRR-H22/6.5-2440	-		
	10'	3050mm	7/8"	22mm	THU-HHRR-H22/6.5-3050	-		



H22 (7/8") Integral Drill Steels

Shank 22x108mm (7/8" x 4 1/4")	Series	Dimensions				Part Number	Compatibility		
		Length		Diameter					
		Imperial	Metric	Imperial	Metric				
	11	2'7"	800mm	1 11/32"	34mm	THU-H22-800/34	714-0834-65 90503753		
		5'3"	1600mm	1 19/64"	33mm	THU-H22-1600/33	714-1633-65 90503757		
		7'10"	2400mm	1 1/4"	32mm	THU-H22-2400/32	714-2432-65 90503761		
		10'6"	3200mm	1 7/32"	31mm	THU-H22-3200/31	714-3231 90503763		
		13'1"	4000mm	1 3/16"	30mm	THU-H22-4000/30	714-4030 90503764		
		15'9"	4800mm	1 9/64"	29mm	THU-H22-4800/29	714-4829 90503765		
		18'4"	5600mm	1 7/64"	28mm	THU-H22-5600/28	714-5628-50 90503766		
		21'	6400mm	1 1/16"	27mm	THU-H22-6400/27	714-6427-50 90503767		
		23'8"	7200mm	1 1/32"	26mm	THU-H22-7200/26	714-7226-50 90504197		
	12	2'7"	800mm	1 37/64"	40mm	THU-H22-800/40	714-0840-65 90503754		
		5'3"	1600mm	1 17/32"	39mm	THU-H22-1600/39	714-1639-65 90503758		
		7'10"	2400mm	1 1/2"	38mm	THU-H22-2400/38	714-2438-65 90503762		
		10'6"	3200mm	1 29/64"	37mm	THU-H22-3200/37	714-3237-65 90503801		
		13'1"	4000mm	1 27/64"	36mm	THU-H22-4000/36	714-4036-65 90503798		
		15'9"	4800mm	1 3/8"	35mm	THU-H22-4800/35	714-4835-65 90503866		
		18'4"	5600mm	1 11/32"	34mm	THU-H22-5600/34	714-5634-65 90503867		
		21'	6400mm	1 19/64"	33mm	THU-H22-6400/33	714-6433-65 90503868		
		23'8"	7200mm	1 1/4"	32mm	THU-H22-7200/32	714-7232-65 90504222		
	13	1'4"	400mm	1 11/32"	34mm	THU-H22-400/34	714-0434-65 90503769		
		2'7"	800mm	1 19/64"	33mm	THU-H22-800/33	714-0833-65 90504245		
		3'11"	1200mm	1 1/4"	32mm	THU-H22-1200/32	714-1232-65 90503755		
		6'7"	2000mm	1 3/16"	30mm	THU-H22-2000/30	714-2030 90503759		
	14	2'	600mm	1 3/8"	35mm	THU-H22-600/35	714-0635-65 90503752		
		3'11"	1200mm	1 11/32"	34mm	THU-H22-1200/34	714-1234-65 90503756		
		5'11"	1800mm	1 19/64"	33mm	THU-H22-1800/33	714-1833-65 90503855		
		7'10"	2400mm	1 1/4"	32mm	THU-H22-2400/32	714-2432-65 90503761		
	15	2'	600mm	1 5/8"	41mm	THU-H22-600/41	714-0641-65 90504195		
		3'11"	1200mm	1 37/64"	40mm	THU-H22-1200/40	714-1240-65 90503852		
		5'11"	1800mm	1 17/32"	39mm	THU-H22-1800/39	714-1839-65 90503851		
		7'10"	2400mm	1 1/2"	38mm	THU-H22-2400/38	714-2438-65 90503762		
	16	6'7"	2000mm	1 19/64"	33mm	THU-H22-2000/33	714-2033-65 90503760		
		26'3"	8000mm	1 1/32"	26mm	THU-H22-8000/26	714-8026-50 90504198		
		28'11"	8800mm	1"	25mm	THU-H22-8800/25	714-8825-5005		
		31'6"	9600mm	1"	25mm	THU-H22-9600/25	714-9625-5005 90504798		
	17	5'3"	1600mm	1 7/64"	28mm	THU-H22-1600/28	714-1628-50 90504420		
		7'10"	2400mm	1 1/16"	27mm	THU-H22-2400/27	714-2427-50 90503641		



R23 Air Leg Drilling Tools

Drill Bit	Flushing Hole, mm		Buttons, mm		Angle	Dimensions, D		Part Number	Compatibility	
	Front No, Size	Gauge No, Size	Front No, Size	Gauge No, Size		Imperial	Metric			
Button bit										
	1x4	1x6	2x7	5x7	35°	1 5/16"	33mm	THU-N33-R23	7737-4433-R48	
	1x6	1x6	2x7	5x8	40°	1 3/8"	35mm	THU-N35-R23	7737-5235-R48	
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38-R23	7737-5238A-R48	
	1x6	1x6	2x8	5x9	35°	1 5/8"	41mm	THU-N41-R23	7737-5241-R48	
Button bit										
	3x4.5	-	3x8	6x9	40°	1 3/4"	45mm	THU-N45-R23	7737-5345-R48	
Drill Rod	Dimensions						Part Number	Compatibility		
	Length		Diameter		Imperial	Metric				
	Imperial	Metric	Imperial	Metric						
Shank adapter, Hex 22 - R23										
	10 3/4"	255mm	7/8"	22mm	THU-H22-R23-255/22	7807-6103-11				
	2'7"	800mm	7/8"	22mm	THU-H22-R32-800/22	7807-6108-11				
	5'3"	1600mm	7/8"	22mm	THU-H22-R23-1600/22	7807-6116-11				
	8'	2440mm	7/8"	22mm	THU-H22-R23-2440/22	7807-6124-11				
	10'	3200mm	7/8"	22mm	THU-H22-R23-3200/22	7807-6132-11				
	11' 9 5/8"	3600mm	7/8"	22mm	THU-H22-R23-3600/22	7807-6136-11				
MF Rod, R23 – Hex22 – R23										
	6' 10 1/2"	2095mm	7/8"	22mm	THU-R23-H22-R23/2095	7857-4821-20				
	10'	3050mm	7/8"	22mm	THU-R23-H22-R23-3050	7857-4831-20				
Shank adapter, Hex 25 – R23										
	10 3/64"	255mm	1"	25mm	THU-H25-R23-255/25	7807-7103-30				

R25 Air Leg Drilling Tools

Drill Bit	Flushing Hole, mm		Buttons, mm		Angle	Dimensions, D		Part Number	Compatibility		
	Front No, Size	Gauge No, Size	Front No, Size	Gauge No, Size		Imperial	Metric				
Cross type bit											
	1x5	2x5	-	-	-	1 3/8"	35mm	THU-X35-R25	7732-1435-42 90514221		
Button bit											
	1x5	1x6	2x7	5x7	45°	1 5/16"	33mm	THU-N33-R25	7732-4433C-S48 90510448		
	1x4	1x6	2x7	5x9	30°	1 3/8"	35mm	THU-N35-R25	7732-4435-S48 90505181		
	1x5	1x6	2x7	5x9	30°	1 7/16"	37mm	THU-N37-R25	7732-4437C-S48 90513899		
	1x6	1x6	2x7	5x8	40°	1 3/8"	35mm	THU-N35-R25/B	7732-5235-R48 90509723		
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38-R25	7732-5238-R48 90505179		
	1x6	1x6	2x8	5x9	35°	1 5/8"	41mm	THU-N41-R25	7732-5241-S48 90505175		
Button bit											
	1x5	1x6	2x7	5x7	45°	1 5/16"	33mm	THU-N33-R25	7732-5345F-R48 90510208		
	1x4	1x6	2x7	5x9	30°	1 3/8"	35mm	THU-N35-R25	7732-5348A-S48 90513912		
Drill Rod			Dimensions				Part Number		Compatibility		
			Length		Diameter						
			Imperial	Metric	Imperial	Metric					
MF-Rod, R25 – Hex 25 – R25			4'	1220mm	1"	25mm	THU-R25-1220/25		7852-3112-20		
	R25		L	R25		R25		R25			
			10'	3025mm	1"	25mm	THU-R25-3025/25		7852-313025-20		
			12'	3660mm	1"	25mm	THU-R25-3660/25		7852-3137-20		
Shank Adapter, Hex25 – R25			7'10"	2400mm	1"	25mm	THU-R25-2400/25		7802-7124-30 90500568		
	Hex D-25		L	R25		R25		R25			
			12'3"	3735mm	1"	25mm	THU-R25-3735/25		7802-71373-30		
Shank adapter, Hex 22 – R25			10 3/64"	255mm	7/8"	22mm	THU-R25-255/22		7802-6103-11 90000237		
	Hex D-22		L	R25		R25		R25			
			2'7"	800mm	7/8"	22mm	THU-R25-800/22		7802-6108-11 90510004		
			3'3"	1000mm	7/8"	22mm	THU-R25-1000/22		7802-6110-11 90531258		
Extension Rod, R25 – Hex 25 – R25			3"	915mm	1"	25mm	THU-R25-915/25-E		7852-2309-20		
	Hex D-25		L	R25		R25		R25			
			4'	1220mm	1"	25mm	THU-R25-1220/25-E		7852-2312-20		
			5'	1525mm	1"	25mm	THU-R25-1525/25-E		7852-2315-20		
			6'	1830mm	1"	25mm	THU-R25-1830/25-E		7852-2318-20		
			8'	2435mm	1"	25mm	THU-R25-2435/25-E		7852-2324-20		
			10'	3050mm	1"	25mm	THU-R25-3050/25-E		7852-2331-20		
Coupling Sleeve, R25			6 1/4"	160mm	1 3/8"	35mm	THU-R25-160/35		7992-3335		
	D		L	D		D		D			

R28 Air Leg Drilling Tools

Drill Bit	Flushing Hole, mm		Buttons, mm		Angle	Dimensions, D		Part Number	Compatibility					
	Front No, Size	Gauge No, Size	Front No, Size	Gauge No, Size		Imperial	Metric							
Button bit														
	1x5	1x6	2x7	5x9	30°	1 7/16"	37mm	THU-N37-R28	7739-5237-S48 90514167					
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38-R28	7739-5238-R48 90514282					
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38-R28/B	7739-5238-S48 90514705					
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38-R28/C	7739-5238-S70					
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38-R28/D	7739-5238-S80					
	1x6	1x6	2x8	2x8	35°	1 5/8"	41mm	THU-N41-R28	7739-5241-S48 90515379					
	1x6	1x6	2x8	5x10	35°	1 11/16"	43mm	THU-N43-R28	7739-5243-S48					
Reaming Tools	Buttons, mm		Angle	Dimensions, D		Part Number	Compatibility							
	Front No, Size	Gauge No, Size		Imperial	Metric									
R28 Reaming Bit, 6° Taper														
	4x8	8x9	25°	2 1/2"	64mm	THU-R64-R28	7722-4864-S48 90510459							
	4x10	8x10	30°	3"	76mm	THU-R76-R28	7722-4876-S48 90510460							
	6x10	8x12	35°	3 1/2"	89mm	THU-R89-R28	7722-4889-S48 90510461							
Pilot Adapter, 6° Taper	Dimensions				Part Number	Compatibility								
	Length		Diameter											
	Imperial	Metric	Imperial	Metric										
	11 1/4"	285mm	1 1/32"	26mm	THU-R285/26-R28	7822-1526 90516259								
Drill Rod	Dimensions				Part Number	Compatibility								
	Length		Diameter											
	Imperial	Metric	Imperial	Metric										
MF Rod, R28 – Round 32 -R28														
	10'	3050mm	1 1/4"	32mm	THU-R28-32-R28-3050	7859-5131-20								
	12'	3660mm	1 1/4"	32mm	THU-R28-32-R28-3660	7859-5137-20								
Drifter Rod, R32 – Hex 28 – R28														
	8' 1 1/2"	2475mm	1 1/8"	28mm	THU-R32-H28-R28-2475	7853-7624-20 90514370								
	9' 1 5/8"	2785mm	1 1/8"	28mm	THU-R32-H28-R28-2785	7853-7627-20 90514164								
	10' 1 5/8"	3090mm	1 1/8"	28mm	THU-R32-H28-R28-3090	7853-7631-20 90514168								
	10' 11 1/2"	3340mm	1 1/8"	28mm	THU-R32-H28-R28-3340	7853-7633-20 90515496								
	12' 1 5/8"	3700mm	1 1/8"	28mm	THU-R32-H28-R28-3700	7853-7637-20 90514966								
	14' 1 1/2"	4305mm	1 1/8"	28mm	THU-R32-H28-R28-4305	7853-7643-20								
Coupling Sleeve														
	5 29/32"	150mm	1 47/64"	44mm	THU-R28-150/44	7993-3644 90515731								



Underground Face and Development Drilling Tools

- Face and Development Drill Bits PAGE 10
- Face and Development Drifter Rods PAGE 15
- Face and Development M/F and Threaded Rods PAGE 17
- Face and Development Coupling Sleeves PAGE 18
- Face and Development Shank Adaptors PAGE 18



Face and Development Drilling Tools

Face drilling or Development drilling refers to the process of drilling holes directly into the "face" or exposed surface of a rock or mineral deposit in mining, tunnelling, and construction activities.

Face drilling requires skilled operators who are knowledgeable about the geological conditions, drilling techniques, and safety protocols. Ensuring the stability of the face during drilling is crucial to prevent accidents, rockfalls, or collapses.

Black Diamond Drilling manufactures and supplies world class drill bits, drill rods and auxiliary drilling tools and equipment suitable to any Face and Development drilling application.

R25 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	1x5	1x5	2x7	5x7	45°	1 5/16"	33mm	THU-N33FF-R25	7732-4433C-S48
	1x4	1x6	2x7	5x9	30°	1 3/8"	35mm	THU-N35FF-R25	7732-4435-S48
	1x5	1x6	2x7	5x9	30°	1 7/16"	37mm	THU-N37FF-R25	7732-4437C-S48
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38FF-R25	7732-5238-R48
	1x6	1x6	2x8	5x9	35°	1 5/8"	41mm	THU-N41FF-R25	7732-5241-S48

R28 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	1x5	1x6	2x7	5x9	30°	1 7/16"	37mm	THU-N37FF-R28	7739-5237-S48
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38FF-R28	7739-5238-R48
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38FF-R28B	7739-5238-S48
	1x6	1x6	2x7	5x9	35°	1 1/2"	38mm	THU-N38FF-R28C	7739-5238-S70
	1x6	1x6	2x8	5x9	35°	1 1/2"	38mm	THU-N38FF-R28D	7739-5238-S80
	1x6	1x6	2x8	5x9	35°	1 5/8"	41mm	THU-N41FF-R28	7739-5241-S48

R32 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility	
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric			
Ballistic Button Bit										
	3x4.5	-	3x8	6x9	10° 35°	1 11/16"	43mm	THU-N43FF-R32-B	7733-6043-F49	
	3x5	-	3x8	6x10	10° 35°	1 3/4"	45mm	THU-N45FF-R32-B	7733-6045-F49	
	3x5	-	3x9	6x10	10° 35°	1 7/8"	48mm	THU-N48FF-R32-B	7733-6048-F49	
	3x6	-	3x9	6x10	10° 40°	2"	51mm	THU-N51FF-R32-B	7733-6051-F49	
Parabolic Button Bit										
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-R32	7733-5243A-S48	
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-R32B	7733-5243A-S70	
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-R32C	7733-5243A-S80	
	1x5	2x6	2x9	5x11	30°	1 3/4"	45mm	THU-N45FF-R32	7733-5245A-S48	
	1x6	2x7.5	2x9	5x11	35°	1 7/8"	48mm	THU-N48FF-R32	7733-5248A-S48	
	1x6	2x7.5	2x10	5x12	35°	2"	51mm	THU-N51FF-R32	7733-5251A-S48	
		3x4.5	1x4.5	3x8	6x9	30°	1 11/16"	43mm	THU-N43FF-R32D	7733-5343A-R48
		3x4.5	1x4.5	3x8	6x10	30°	1 3/4"	45mm	THU-N45FF-R32B	7733-5345A-R48
		3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-R32C	7733-5345A-S48
		3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-R32D	7733-5345A-S70
		3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-R32E	7733-5345A-S80
		3x5	1x5	3x9	6x10	30°	1 7/8"	48mm	THU-N48FF-R32B	7733-5348A-R48
		3x6	1x6	3x9	6x10	40°	2"	51mm	THU-N51FF-R32B	7733-1651A-R48
		3x6	1x6	3x9	6x10	35°	2"	51mm	THU-N51FF-R32C	7733-1651A-S48
		3x6	1x6	3x10	6x11	35°	2 1/4"	57mm	THU-N57FF-R32	7733-1657A-S48
		1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-R32	7733-1345A-42
Dome Reaming Bit										
	3x6	1x6	1x13	14x13	35°	4"	102mm	THU-REAMER-D-102-R32	-	
	3x6	1x6	1x13	18x13	35°	5"	127mm	THU-REAMER-D-127-R32	-	
Spear Reaming Bit										
	3x6	1x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-R32	7733-5602P-S48	
	3x7	1x6	3x10	16x13	35°	5"	127mm	THU-REAMER-S-127/41-R32	7733-5627P-S48	
Two Piece Reamer Pilot Bit										
	-	-	-	-	12°	1 9/16"	40mm	THU-REAMER-PILOT-R32/12D	90516258	
Two Piece Reaming Bit										
	-	-	4x10	8x12	12°	3 1/2"	89mm	THU-REAMER-OUTER-89/12D	90510174	
	-	-	4x11	8x11	12°	4"	102mm	THU-REAMER-OUTER-102/12D	90510468	
	-	-	8x12	12x12	12°	5"	127mm	THU-REAMER-OUTER-127/12D	90510470	

BD33 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric	
Ballistic Button bit								
	3x4.5	-	3x8	6x9	10° 35°	1 11/16"	43mm	THU-N43FF-BD33-B
	3x5	-	3x8	6x10	10° 35°	1 3/4"	45mm	THU-N45FF-BD33-B
	3x5	-	3x9	6x10	10° 35°	1 7/8"	48mm	THU-N48FF-BD33-B
	3x6	-	3x9	6x10	10° 40°	2"	51mm	THU-N51FF-BD33-B
Parabolic Button bit								
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-BD33
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-BD33B
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-BD33C
	1x5	2x6	2x9	5x11	30°	1 3/4"	45mm	THU-N45FF-BD33
	1x6	2x7.5	2x9	5x11	35°	1 7/8"	48mm	THU-N48FF-BD33
	1x6	2x7.5	2x10	5x12	35°	2"	51mm	THU-N51FF-BD33
	3x4.5	1x4.5	3x8	6x9	30°	1 11/16"	43mm	THU-N43FF-BD33D
	3x4.5	1x4.5	3x8	6x10	30°	1 3/4"	45mm	THU-N45FF-BD33B
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-BD33C
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-BD33D
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-BD33E
	3x5	1x5	3x9	6x10	30°	1 7/8"	48mm	THU-N48FF-BD33B
	3x6	1x6	3x9	6x10	40°	2"	51mm	THU-N51FF-BD33B
	3x6	1x6	3x9	6x10	35°	2"	51mm	THU-N51FF-BD33C
	3x6	1x6	3x10	6x11	35°	2 1/4"	57mm	THU-N57FF-BD33
	1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-BD33
Dome Reaming Bit								
	3x6	1x6	1x13	14x13	35°	4"	102mm	THU-REAMER-D-102-BD33
	3x6	1x6	1x13	18x13	35°	5"	127mm	THU-REAMER-D-127-BD33
Spear Reaming Bit								
	3x6	1x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-BD33
	3x7	1x6	3x10	16x13	35°	5"	127mm	THU-REAMER-S-127/41-BD33
Two Piece Reamer Pilot Bit								
	-	-	-	-	12°	1 9/16"	40mm	THU-REAMER-PILOT-BD33/12D
Two Piece Reaming Bit								
	-	-	4x10	8x12	12°	3 1/2"	89mm	THU-REAMER-OUTER-89/12D
	-	-	4x11	8x11	12°	4"	102mm	THU-REAMER-OUTER-102/12D
	-	-	8x12	12x12	12°	5"	127mm	THU-REAMER-OUTER-127/12D

BD35 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric	
Ballistic Button bit	3x4.5	-	3x8	6x9	10° 35°	1 11/16"	43mm	THU-N43FF-BD35-B
	3x5	-	3x8	6x10	10° 35°	1 3/4"	45mm	THU-N45FF-BD35-B
	3x5	-	3x9	6x10	10° 35°	1 7/8"	48mm	THU-N48FF-BD35-B
	3x6	-	3x9	6x10	10° 40°	2"	51mm	THU-N51FF-BD35-B
Parabolic Button bit	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-BD35
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-BD35B
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-BD35C
	1x5	2x6	2x9	5x11	30°	1 3/4"	45mm	THU-N45FF-BD35
	1x6	2x7.5	2x9	5x11	35°	1 7/8"	48mm	THU-N48FF-BD35
	1x6	2x7.5	2x10	5x12	35°	2"	51mm	THU-N51FF-BD35
	3x4.5	1x4.5	3x8	6x9	30°	1 11/16"	43mm	THU-N43FF-BD35D
	3x4.5	1x4.5	3x8	6x10	30°	1 3/4"	45mm	THU-N45FF-BD35B
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-BD35C
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-BD35D
Dome Reaming Bit	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-BD35E
	3x5	1x5	3x9	6x10	30°	1 7/8"	48mm	THU-N48FF-BD35B
	3x6	1x6	3x9	6x10	40°	2"	51mm	THU-N51FF-BD35B
	3x6	1x6	3x9	6x10	35°	2"	51mm	THU-N51FF-BD35C
	3x6	1x6	3x10	6x11	35°	2 1/4"	57mm	THU-N57FF-BD35
	1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-BD35
Spear Reaming Bit	3x6	1x6	1x13	14x13	35°	4"	102mm	THU-REAMER-D-102-BD35
	3x6	1x6	1x13	18x13	35°	5"	127mm	THU-REAMER-D-127-BD35
Two Piece Reamer Pilot Bit	3x6	1x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-BD35
	3x7	1x6	3x10	16x13	35°	5"	127mm	THU-REAMER-S-127/41-BD35
Two Piece Reaming Bit	-	-	-	-	12°	1 9/16"	40mm	THU-REAMER-PILOT-BD35/12D
	-	-	4x10	8x12	12°	3 1/2"	89mm	THU-REAMER-OUTER-89/12D
	-	-	4x11	8x11	12°	4"	102mm	THU-REAMER-OUTER-102/12D
	-	-	8x12	12x12	12°	5"	127mm	THU-REAMER-OUTER-127/12D

T38 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric	
Ballistic Button bit								
	3x4.5	-	3x8	6x9	10° 35°	1 11/16"	43mm	THU-N43FF-T38-B
	3x5	-	3x8	6x10	10° 35°	1 3/4"	45mm	THU-N45FF-T38-B
	3x5	-	3x9	6x10	10° 35°	1 7/8"	48mm	THU-N48FF-T38-B
	3x6	-	3x9	6x10	10° 40°	2"	51mm	THU-N51FF-T38-B
Parabolic Button bit								
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-T38
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-T38B
	1x5	2x6	2x9	5x10	35°	1 11/16"	43mm	THU-N43FF-T38C
	1x5	2x6	2x9	5x11	30°	1 3/4"	45mm	THU-N45FF-T38
	1x6	2x7.5	2x9	5x11	35°	1 7/8"	48mm	THU-N48FF-T38
	1x6	2x7.5	2x10	5x12	35°	2"	51mm	THU-N51FF-T38
	3x4.5	1x4.5	3x8	6x9	30°	1 11/16"	43mm	THU-N43FF-T38D
	3x4.5	1x4.5	3x8	6x10	30°	1 3/4"	45mm	THU-N45FF-T38B
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-T38C
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-T38D
	3x4.5	1x4.5	3x8	6x10	25°	1 3/4"	45mm	THU-N45FF-T38E
	3x5	1x5	3x9	6x10	30°	1 7/8"	48mm	THU-N48FF-T38B
	3x6	1x6	3x9	6x10	40°	2"	51mm	THU-N51FF-T38B
	3x6	1x6	3x9	6x10	35°	2"	51mm	THU-N51FF-T38C
	3x6	1x6	3x10	6x11	35°	2 1/4"	57mm	THU-N57FF-T38
	1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-T38
Dome Reaming Bit								
	3x6	1x6	1x13	14x13	35°	4"	102mm	THU-REAMER-D-102-T38
	3x6	1x6	1x13	18x13	35°	5"	127mm	THU-REAMER-D-127-T38
Spear Reaming Bit								
	3x6	1x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-T38
	3x7	1x6	3x10	16x13	35°	5"	127mm	THU-REAMER-S-127/41-T38

DRIFTER RODS R32 – Hex 25 - R25

RODS	Dimensions				Part Number	Compatibility		
	Length, L		Diameter					
	Imperial	Metric	Imperial	Metric				
	6' 1 1/2"	1870mm	1"	25mm	THU-JS-R32/H25/R25-1870	7853-2418-20		
	7' 1 5/8"	2175mm	1"	25mm	THU-JS-R32/H25/R25-2175	7853-2421-20		
	8' 1 1/2"	2475mm	1"	25mm	THU-JS-R32/H25/R25-2475	7853-2424-20		
	8' 7 1/2"	2630mm	1"	25mm	THU-JS-R32/H25/R25-2630	7853-2426-20		
	9' 1 5/8"	2785mm	1"	25mm	THU-JS-R32/H25/R25-2785	7853-2427-20		
	9' 7 1/2"	2935mm	1"	25mm	THU-JS-R32/H25/R25-2935	7853-2429-20		
	10' 1 5/8"	3090mm	1"	25mm	THU-JS-R32/H25/R25-3090	7853-2431-20		
	10' 11 1/2"	3340mm	1"	25mm	THU-JS-R32/H25/R25-3340	7853-2433-20		
	12' 1 5/8"	3700mm	1"	25mm	THU-JS-R32/H25/R25-3700	7853-2437-20		


DRIFTER RODS R32 – Hex 28 – R28

RODS	Dimensions				Part Number	Compatibility		
	Length, L		Diameter					
	Imperial	Metric	Imperial	Metric				
	8' 1 1/2"	2475mm	1 1/8"	28mm	THU-JS-R32/H28/R28-2475	7853-7624-20		
	9' 1 5/8"	2785mm	1 1/8"	28mm	THU-JS-R32/H28/R28-2785	7853-7627-20		
	10' 1 5/8"	3090mm	1 1/8"	28mm	THU-JS-R32/H28/R28-3090	7853-7631-20		
	10' 11 1/2"	3340mm	1 1/8"	28mm	THU-JS-R32/H28/R28-3340	7853-7633-20		
	12' 1 5/8"	3700mm	1 1/8"	28mm	THU-JS-R32/H28/R28-3700	7853-7637-20		
	14' 1 1/2"	4305mm	1 1/8"	28mm	THU-JS-R32/H28/R28-4305	7853-7643-20		


DRIFTER RODS T38 – Hex 35 – R32

RODS	Dimensions				Part Number	Compatibility		
	Length		Diameter					
	Imperial	Metric	Imperial	Metric				
	8' 1 1/2"	2475mm	1 3/8"	35mm	THU-JS-T38/H35/R32-2475	7324-9624-20		
	10' 1 5/8"	3090mm	1 3/8"	35mm	THU-JS-T38/H35/R32-3090	7324-9631-20		
	12' 1 5/8"	3700mm	1 3/8"	35mm	THU-JS-T38/H35/R32-3700	7324-9637-20		
	14' 1 1/2"	4305mm	1 3/8"	35mm	THU-JS-T38/H35/R32-4305	7324-9643-20		
	16' 1 1/2"	4915mm	1 3/8"	35mm	THU-JS-T38/H35/R32-4915	7324-9649-20		
	18' 1 1/2"	5525mm	1 3/8"	35mm	THU-JS-T38/H35/R32-5525	7324-9655-20		
	20' 1 1/2"	6135mm	1 3/8"	35mm	THU-JS-T38/H35/R32-6135	7324-9661-20		
	21' 1 1/2"	6440mm	1 3/8"	35mm	THU-JS-T38/H35/R32-6440	7324-9664-20		

DRIFTER RODS T38 – Hex 35 – BD35


RODS	Dimensions				Part Number	
	Length, L		Diameter			
	Imperial	Metric	Imperial	Metric		
	8' 1 1/2"	2475mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-2475	
	10' 1 5/8"	3090mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-3090	
	12' 1 5/8"	3700mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-3700	
	14' 1 1/2"	4305mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-4305	
	16' 1 1/2"	4915mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-4915	
	18' 1 1/2"	5525mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-5525	
	20' 1 1/2"	6135mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-6135	
	21' 1 1/2"	6440mm	1 3/8"	35mm	THU-JS-T38/H35/BD35-6440	

DRIFTER RODS T38 – Hex 35 – T38


RODS	Dimensions				Part Number	
	Length, L		Diameter			
	Imperial	Metric	Imperial	Metric		
	8' 1 1/2"	2475mm	1 3/8"	35mm	THU-JS-T38/H35/T38-2475	
	10' 1 5/8"	3090mm	1 3/8"	35mm	THU-JS-T38/H35/T38-3090	
	12' 1 5/8"	3700mm	1 3/8"	35mm	THU-JS-T38/H35/T38-3700	
	14' 1 1/2"	4305mm	1 3/8"	35mm	THU-JS-T38/H35/T38-4305	
	16' 1 1/2"	4915mm	1 3/8"	35mm	THU-JS-T38/H35/T38-4915	
	18' 1 1/2"	5525mm	1 3/8"	35mm	THU-JS-T38/H35/T38-5525	
	20' 1 1/2"	6135mm	1 3/8"	35mm	THU-JS-T38/H35/T38-6135	
	21' 1 1/2"	6440mm	1 3/8"	35mm	THU-JS-T38/H35/T38-6440	



DRIFTER RODS T38 – Hex 35 – BD33

RODS	Dimensions				Part Number	
	Length, L		Diameter			
	Imperial	Metric	Imperial	Metric		
	8' 1 1/2"	2475mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-2475	
	10' 1 5/8"	3090mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-3090	
	12' 1 5/8"	3700mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-3700	
	14' 1 1/2"	4305mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-4305	
	16' 1 1/2"	4915mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-4915	
	18' 1 1/2"	5525mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-5525	
	20' 1 1/2"	6135mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-6135	
	21' 1 1/2"	6440mm	1 3/8"	35mm	THU-JS-T38/H35/BD33-6440	


DRIFTER RODS T38 – Round 39 – T38

RODS	Dimensions				Part Number	
	Length, L		Diameter			
	Imperial	Metric	Imperial	Metric		
	8' 1 1/2"	2475mm	1 17/32"	39mm	THU-JS-T38/R39/T38-2475	
	10' 1 5/8"	3090mm	1 17/32"	39mm	THU-JS-T38/R39/T38-3090	
	12' 1 5/8"	3700mm	1 17/32"	39mm	THU-JS-T38/R39/T38-3700	
	14' 1 1/2"	4305mm	1 17/32"	39mm	THU-JS-T38/R39/T38-4305	
	16' 1 1/2"	4915mm	1 17/32"	39mm	THU-JS-T38/R39/T38-4915	
	18' 1 1/2"	5525mm	1 17/32"	39mm	THU-JS-T38/R39/T38-5525	
	20' 1 1/2"	6135mm	1 17/32"	39mm	THU-JS-T38/R39/T38-6135	
	21' 1 1/2"	6440mm	1 17/32"	39mm	THU-JS-T38/R39/T38-6440	

MF SPEED RODS T38 – Round 39 – T38

RODS	Dimensions				Part Number	
	Length, L		Diameter			
	Imperial	Metric	Imperial	Metric		
	8' 1 1/2"	2475mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-2475-MF	
	10' 1 5/8"	3090mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-3090-MF	
	12' 1 5/8"	3700mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-3700-MF	
	14' 1 1/2"	4305mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-4305-MF	
	16' 1 1/2"	4915mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-4915-MF	
	18' 1 1/2"	5525mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-5525-MF	
	20' 1 1/2"	6135mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-6135-MF	
	21' 1 1/2"	6440mm	1 17/32"	39mm	ROD-THU-T38/R39/T38-6440-MF	

THREADED RODS T38

RODS	Dimensions				Part Number	
	Length, L		Diameter			
	Imperial	Metric	Imperial	Metric		
	12'	3660mm	1 1/2"	38mm	THU-TROD-T38-3660	

COUPLING SLEEVES

COUPLING SLEEVES	Threads	Dimensions				Part Number	
		Length, L		Diameter, D			
		Imperial	Metric	Imperial	Metric		
	T38 R32	10 41/64"	270mm	2 1/4"	45mm	THU-COUP-T38/R32-FB	
	T38 BD35	7 1/2"	190mm	2 5/32"	55mm	THU-COUP-T38/BD35-FB	
	T38 T38	7 1/2"	190mm	2 5/32"	55mm	THU-COUP-T38/T38-FB	
	T45 R32	7 1/2"	190mm	2 13/32"	61mm	THU-COUP-T45/R32-FB	
	T45 T38	8 43/64"	180mm	2 13/32"	61mm	THU-COUP-T45/T38-FB	
	T45 T45	8 1/4"	210mm	2 33/64"	63mm	THU-COUP-T45/T45-FB	

SHANK ADAPTORS

SHANK ADAPTOR	Drifter Model	Thread	Length, L	Part Number
	HLX5/RDX5	T38	500mm	THU-SHANK-HLX5/500-T38
	HLX5/RDX5	T45	500mm	THU-SHANK-HLX5/500-T45
	RD520/525	T38	525mm	THU-SHANK-RD520/525-T38
	RD520/525	T45	525mm	THU-SHANK-RD520/525-T45
	COP MD20	T38	470mm	THU-SHANK-COPMD20-T38
	COP MD20	T38	560mm	THU-SHANK-COPMD20-T45
	COP 1838+	T38	525mm	THU-SHANK-COP1838-T38/525/38
	COP 1838+	T45	525mm	THU-SHANK-COP1838-T45/525/52
	COP 1838MUX+/HUX+	T38	730mm	THU-SHANK-1838MUX-T38/730/52
	COP 1838MUX+/HUX+	T45	730mm	THU-SHANK-1838MUX-T45/730/52





Underground Production Drilling Tools

- Underground Production Drill Bits PAGE 20
- Underground Production M/F Speed Rods PAGE 26
- Underground Production Guide Tubes PAGE 27
- Underground Production Drill Tubes PAGE 27
- Underground Production Drilling Shank Adaptors PAGE 28
- Underground Production Drilling Bit Adaptors PAGE 29

R32 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
Parabolic Button Bit									
	2x6	1x6	2x8	6x9	35°	1 5/8"	41mm	THU-N41FF-R32	90505171
	2x5	2x6	2x9	6x10	35°	1 11/16"	43mm	THU-N43FF-R32	7733-6043-F49
	2x5	2x6	2x9	6x10	30°	1 3/4"	45mm	THU-N45FF-R32	7733-6045-F49
	2x5	2x6	2x9	6x11	35°	1 7/8"	48mm	THU-N48FF-R32	7733-6048-F49
	2x6	2x7.5	2x10	6x12	30°	2"	51mm	THU-N51FF-R32	7733-6051-F49
	3x6	1x6	3x10	6x11	30°	2 1/4"	57mm	THU-N57FF-R32	90510453
	3x7	2x6	3x11	6x12	30°	2 1/2"	64mm	THU-N64FF-R32	7733-1664-S48
	4x7	-	5x10	6x11	30°	3"	76mm	THU-N76FF-R32	7733-1876-S48
	Semi-Ballistic Button Bit								
	3x4.5	2x6	3x8	6x9	10° 35°	1 5/8"	41mm	THU-N41FF-R32-SB	90505172
	3x4.5	2x6	3x9	6x10	10° 35°	1 11/16"	43mm	THU-N43FF-R32-SB	7733-5243A-S48
	3x5	2x6	3x9	6x11	10° 35°	1 3/4"	45mm	THU-N45FF-R32-SB	7733-5245A-S48
	3x6	2x7.5	3x9	6x11	10° 35°	1 7/8"	48mm	THU-N48FF-R32-SB	7733-5248A-S48
	3x6	2x7.5	3x10	6x12	10° 40°	2"	51mm	THU-N51FF-R32-SB	7733-5251A-S48
	3x4.5	1x4.5	3x8	6x9	10° 40°	2 1/4"	57mm	THU-N57FF-R32-SB	7733-5343A-R48
	3x4.5	1x4.5	3x8	6x10	10° 40°	2 1/2"	64mm	THU-N64FF-R32-SB	7733-5345A-R48
	3x4.5	1x4.5	3x8	6x10	10° 40°	3"	76mm	THU-N76FF-R32-SB	7733-5345A-S48
	Ballistic Button Bit								
	2x4.5	2x6	2x8	6x9	10° 35°	1 5/8"	41mm	THU-N41FF-R32-B	-
	2x4.5	2x6	2x9	6x10	10° 35°	1 11/16"	43mm	THU-N43FF-R32-B	-
	2x5	2x6	2x9	6x11	10° 35°	1 3/4"	45mm	THU-N45FF-R32-B	7733-5345A-S80
	2x6	2x7.5	2x9	6x11	10° 35°	1 7/8"	48mm	THU-N48FF-R32-B	7733-5348A-R48
	3x5	1x6	2x9	6x12	10° 40°	2"	51mm	THU-N51FF-R32-B	7733-1651A-R48
	3x5	1x6	3x9	6x9	10° 40°	2 1/4"	57mm	THU-N57FF-R32-B	7733-1651A-S48
	3x5	1x6	3x9	6x10	10° 40°	2 1/2"	64mm	THU-N64FF-R32-B	7733-1657A-S48
	3x5	1x6	3x9	6x10	10° 40°	3"	76mm	THU-N76FF-R32-B	-
	Cross Type Bit								
	1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-R32	7733-1345A-42
	Dome Reaming Bit								
	3x6	1x6	1x13	12x13	35°	4"	102mm	THU-REAMER-D-102-R32	-
	3x6	1x6	1x13	12x13	35°	5"	127mm	THU-REAMER-D-127-R32	-
	-	3x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-R32	7733-5602P-S48
	-	3x6	3x10	12x13	35°	5"	127mm	THU-REAMER-S-127/76-R32	7733-5627P-S48



BD35 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric	
Parabolic Button Bits								
	2x6	1x6	2x8	6x9	35°	1 5/8"	41mm	THU-N41FF-BD35
	2x5	2x6	2x9	6x10	35°	1 11/16"	43mm	THU-N43FF-BD35
	2x5	2x6	2x9	6x10	30°	1 3/4"	45mm	THU-N45FF-BD35
	2x5	2x6	2x9	6x11	35°	1 7/8"	48mm	THU-N48FF-BD35
	2x6	2x7.5	2x10	6x12	30°	2"	51mm	THU-N51FF-BD35
	3x6	1x6	3x10	6x11	30°	2 1/4"	57mm	THU-N57FF-BD35
	3x7	2x6	3x11	6x12	30°	2 1/2"	64mm	THU-N64FF-BD35
	4x7	-	5x10	8x11	30°	3"	76mm	THU-N76FF-BD35
Semi-Ballistic Button Bits								
	3x4.5	2x6	3x8	6x9	10° 35°	1 5/8"	41mm	THU-N41FF-BD35-SB
	3x4.5	2x6	3x9	6x10	10° 35°	1 11/16"	43mm	THU-N43FF-BD35-SB
	3x5	2x6	3x9	6x11	10° 35°	1 3/4"	45mm	THU-N45FF-BD35-SB
	3x6	2x7.5	3x9	6x11	10° 35°	1 7/8"	48mm	THU-N48FF-BD35-SB
	3x6	2x7.5	3x10	6x12	10° 40°	2"	51mm	THU-N51FF-BD35-SB
	3x4.5	1x4.5	3x8	6x9	10° 40°	2 1/4"	57mm	THU-N57FF-BD35-SB
	3x4.5	1x4.5	3x8	6x10	10° 40°	2 1/2"	64mm	THU-N64FF-BD35-SB
	3x4.5	1x4.5	3x8	6x10	10° 40°	3"	76mm	THU-N76FF-BD35-SB
Ballistic Button Bits								
	2x4.5	2x6	2x8	6x9	10° 35°	1 5/8"	41mm	THU-N41FF-BD35-B
	2x4.5	2x6	2x9	6x10	10° 35°	1 11/16"	43mm	THU-N43FF-BD35-B
	2x5	2x6	2x9	6x11	10° 35°	1 3/4"	45mm	THU-N45FF-BD35-B
	2x6	2x7.5	2x9	6x11	10° 35°	1 7/8"	48mm	THU-N48FF-BD35-B
	3x5	1x6	2x9	6x12	10° 40°	2"	51mm	THU-N51FF-BD35-B
	3x5	1x6	3x9	6x9	10° 40°	2 1/4"	57mm	THU-N57FF-BD35-B
	3x5	1x6	3x9	6x10	10° 40°	2 1/2"	64mm	THU-N64FF-BD35-B
	3x5	1x6	3x9	6x10	10° 40°	3"	76mm	THU-N76FF-BD35-B
Cross Type Bit								
	1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-BD35
Dome Reaming Bits								
	3x6	1x6	1x13	12x13	35°	4"	102mm	THU-REAMER-D-102-BD35
	3x6	1x6	1x13	12x13	35°	5"	127mm	THU-REAMER-D-127-BD35
Spear Reaming Bits								
	-	3x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-BD35
	-	3x6	3x10	12x13	35°	5"	127mm	THU-REAMER-S-127/76-BD35

R35 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric	
Parabolic Button Bits								
	2x6	1x6	2x8	6x9	35°	1 5/8"	41mm	THU-N41FF-R35
	2x5	2x6	2x9	6x10	35°	1 11/16"	43mm	THU-N43FF-R35
	2x5	2x6	2x9	6x10	30°	1 3/4"	45mm	THU-N45FF-R35
	2x5	2x6	2x9	6x11	35°	1 7/8"	48mm	THU-N48FF-R35
	2x6	2x7.5	2x10	6x12	30°	2"	51mm	THU-N51FF-R35
	3x6	1x6	3x10	6x11	30°	2 1/4"	57mm	THU-N57FF-R35
	3x7	2x6	3x11	6x12	30°	2 1/2"	64mm	THU-N64FF-R35
	4x7	-	5x10	8x11	30°	3"	76mm	THU-N76FF-R35
Semi-Ballistic Button Bits								
	3x4.5	2x6	3x8	6x9	10° 35°	1 5/8"	41mm	THU-N41FF-R35-SB
	3x4.5	2x6	3x9	6x10	10° 35°	1 11/16"	43mm	THU-N43FF-R35-SB
	3x5	2x6	3x9	6x11	10° 35°	1 3/4"	45mm	THU-N45FF-R35-SB
	3x6	2x7.5	3x9	6x11	10° 35°	1 7/8"	48mm	THU-N48FF-R35-SB
	3x6	2x7.5	3x10	6x12	10° 40°	2"	51mm	THU-N51FF-R35-SB
	3x4.5	1x4.5	3x8	6x9	10° 40°	2 1/4"	57mm	THU-N57FF-R35-SB
	3x4.5	1x4.5	3x8	6x10	10° 40°	2 1/2"	64mm	THU-N64FF-R35-SB
	3x4.5	1x4.5	3x8	6x10	10° 40°	3"	76mm	THU-N76FF-R35-SB
Ballistic Button Bits								
	2x4.5	2x6	2x8	6x9	10° 35°	1 5/8"	41mm	THU-N41FF-R35-B
	2x4.5	2x6	2x9	6x10	10° 35°	1 11/16"	43mm	THU-N43FF-R35-B
	2x5	2x6	2x9	6x11	10° 35°	1 3/4"	45mm	THU-N45FF-R35-B
	2x6	2x7.5	2x9	6x11	10° 35°	1 7/8"	48mm	THU-N48FF-R35-B
	3x5	1x6	2x9	6x12	10° 40°	2"	51mm	THU-N51FF-R35-B
	3x5	1x6	3x9	6x9	10° 40°	2 1/4"	57mm	THU-N57FF-R35-B
	3x5	1x6	3x9	6x10	10° 40°	2 1/2"	64mm	THU-N64FF-R35-B
	3x5	1x6	3x9	6x10	10° 40°	3"	76mm	THU-N76FF-R35-B
Cross Type Bit								
	1x4.5	4x4.5	-	-	-	1 3/4"	45mm	THU-N45X-R35
Dome Reaming Bits								
	3x6	1x6	3x13	12x13	35°	4"	102mm	THU-REAMER-D-102-R35
	3x6	1x6	3x13	12x13	35°	5"	127mm	THU-REAMER-D-127-R35
Spear Reaming Bits								
	-	3x6	3x10	12x13	35°	4"	102mm	THU-REAMER-S-102/41-R35
	-	3x6	3x10	12x13	35°	5"	127mm	THU-REAMER-S-127/76-R35

T38 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	3x5	1x5	4x10	6x10	40°	2 1/2"	64mm	THU-N64FF-T38	7514-2664A-S48
	3x6	1x6	4x10	6x10	30°	2 1/2"	64mm	THU-N64DC-T38	7514-1664-R48
	3x5	1x6	3x10	6x10	30°	2 1/2"	64mm	THU-R64FF-T38	7732-4437C-S48
	3x6	1x6	3x10	6x10	35°	2 1/2"	64mm	THU-R64DC-T38	7514-4864-R48
	3x6	2x6	3x10	6x10	35°	3"	76mm	THU-N76FF-T38	7732-5241-S48
	3x6	2x6	3x10	6x10	35°	3"	76mm	THU-N76DC-T38	7514-1876-R48
	3x11	1x6	4x11	6x11	35°	3"	76mm	THU-R76FF-T38	7514-7876A-S48
	3x8	-	4x11	6x11	35°	3"	76mm	THU-R76DC-T38	7514-4876-R48
	1	2	-	-	-	2 1/2"	64mm	THU-N64X-T38	-
	1	2	-	-	-	3"	76mm	THU-N76X-T38	-
	1	2	-	-	-	3 1/2"	89mm	THU-N89X-T38	-
	2x13	1x13	3x13	12x13	35°	4"	102mm	THU-REAMER-D-102-T38	-
	2x13	1x13	3x13	12x13	35°	5"	127mm	THU-REAMER-D-127-T38	-
	-	4x9	3x14	12x14	35°	5"	127mm	THU-REAMER-S-127/76-T38B	7514-5627-S48
	-	4x9	3x14	12x14	35°	6"	152mm	THU-REAMER-S-152/80-T38	7514-5652-S48

T45 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	3x12	-	4x12	6x12	30°	3"	76mm	THU-N76FF-T45	7515-2676A-S48
	3x10	-	4x11	6x12	35°	3"	76mm	THU-N76DC-T45	7515-5576A-C60
	3x11	-	4x11	6x11	35°	3"	76mm	THU-R76FF-T45	7515-7876A-S48
	3x9	-	4x11	6x12	35°	3"	76mm	THU-R76DC-T45	7515-7576A-C60
	4x10	-	6x10	8x11	35°	3 1/2"	89mm	THU-N89FF-T45	7515-2689A-S48
	4x10	-	6x11	8x13	35°	3 1/2"	89mm	THU-N89DC-T45	7515-5589A-C60
	2x10	-	6x10	8x11	35°	3 1/2"	89mm	THU-R89FF-T45	7515-7889A-S48
	2x10	-	6x12	8x13	40°	3 1/2"	89mm	THU-R89DC-T45	7515-7589A-C60
	3x9	1x9	3x13	12x13	35°	5"	127mm	THU-REAMER-D-127-T45	-
	3x9	1x9	3x14	12x14	35°	6"	152mm	THU-REAMER-D-152-T45	-
	-	4x9	3x14	12x14	35°	5"	127mm	THU-REAMER-S-127/76-T45B	7515-5627-S48
	-	4x9	3x14	12x14	35°	6"	152mm	THU-REAMER-S-152/80-T45B	7515-5652-S48
	-	4x9	3x14	12x14	35°	8"	204mm	THU-REAMER-S-204/137-T45	7528-5604-S81

T51 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	4x12	-	6x10	8x11	35°	3 1/2"	89mm	THU-N89FF-T51	7516-2689A-S48
	4x12	-	6x11	8x13	40°	3 1/2"	89mm	THU-N89DC-T51	7516-5589A-C60
	2x12	-	6x10	8x11	35°	3 1/2"	89mm	THU-R89FF-T51	7516-7889A-S48
	2x12	-	6x11	8x13	40°	3 1/2"	89mm	THU-R89DC-T51	7516-7589A-C60
	2x13	-	6x11	8x13	40°	4"	102mm	THU-N102FF-T51	7516-1902-R48
	2x11	-	6x11	8x13	40°	4"	102mm	THU-N102DC-T51	7516-5502A-C60
	4x10	-	6x12	8x13	35°	4"	102mm	THU-R102FF-T51	7516-7002-S70
	4x11	-	6x11	8x13	40°	4"	102mm	THU-R102DC-T51	7516-7502A-C60
	3x11	-	3x14	12x14	35°	6"	152mm	THU-REAMER-D-152-T51	-
	-	4x9	-	12x14	35°	5"	127mm	THU-REAMER-S-127/76-T51	-
	-	3x16	-	12x16	35°	6"	152mm	THU-REAMER-S-152/80-T51B	7516-5652-S48
	-	3x16	-	12x16	35°	8"	204mm	THU-REAMER-S-204/137-T51	7529-5604-S81

ST58 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	4x10	-	6x12	8x13	40°	3 1/2"	89mm	THU-N89FF-ST58	7528-6289-F70
	4x10	-	6x12	8x12	35°	3 1/2"	89mm	THU-N89DC-ST58	7528-8489-R65
	3x12	-	8x11	9x13	35°	3 1/2"	89mm	THU-R89FF-ST58	7528-8589-S70
	3x12	-	8x12	9x12	35°	3 1/2"	89mm	THU-R89DC-ST58	7528-7389-R65
	2x12	-	7x12	8x12	35°	4"	102mm	THU-R102FF-ST58	7528-7302-R70
	2x12	-	7x14	8x14	35°	4 1/2"	115mm	THU-N115FF-ST58	7733-5345A-R48
	4x10	-	6x14	8x14	35°	4 1/2"	115mm	THU-N115DC-ST58	-
	4x10	-	6x14	8x14	35°	4 1/2"	115mm	THU-R115FF-ST58	7528-7315-R70
	3x9	-	-	12x14	35°	5"	127mm	THU-REAMER-S-127/76-ST58	7528-5627-S81
	3x9	-	-	12x14	35°	6"	152mm	THU-REAMER-S-152/80-ST58	7528-5652-S81
	3x16	-	-	12x16	35°	8"	204mm	THU-REAMER-S-204/137-ST58	7528-5604-S81

ST68 BIT THREAD

BITS	Flushing Hole, mm		Buttons, mm		Angle	Dimensions		Part Number	Compatibility
	Front No Size	Gauge No Size	Front No Size	Gauge No Size		Imperial	Metric		
	4x13	-	6x12	8x14	40°	4"	102mm	THU-N102FF-ST58	7529-6202-F70
	4x10	-	6x12	8x12	35°	4"	102mm	THU-N102DC-ST68	7529-8402-R65
	3x15	-	8x14	9x16	35°	4"	102mm	THU-R102FF-ST68	7529-8902-S65
	3x10	-	8x12	9x12	35°	4"	102mm	THU-R102DC-ST68	7529-7302-R70
	2x10	-	7x14	8x14	35°	4 1/2"	115mm	THU-N115DC-ST68	7529-8415-R70
	2x10	-	7x14	8x14	35°	4 1/2"	115mm	THU-R115FF-ST68	7529-7315-R65
	4x12	-	6x14	8x16	35°	5"	127mm	THU-N127FF-ST68	-
	4x12	-	6x14	8x16	35°	5"	127mm	THU-R127FF-ST68	-
	3x9	-	-	12x16	35°	6"	152mm	THU-REAMER-S-152/80-ST68	7529-5652-S81
	3x16	-	-	12x16	35°	8"	204mm	THU-REAMER-S-204/137-ST68	7529-5604-S81
	3x16	-	-	12x18	35°	10"	254mm	THU-REAMER-S-254/150-ST68	7529-5654-S65



MF SPEED RODS

ROD THREAD	Dimensions				Part Number	Compatibility		
	Length, L		Diameter					
	Imperial	Metric	Imperial	Metric				
R32	4"	1220mm	1 1/4"	32mm	ROD-THU-R32/R32/R32-1220-MF	90500834		
	5"	1525mm	1 1/4"	32mm	ROD-THU-R32/R32/R32-1525-MF	90500627		
	6"	1830mm	1 1/4"	32mm	ROD-THU-R32/R32/R32-1830-MF	90500628		
T35	4"	1220mm	1 1/2"	39mm	ROD-THU-T35/R39/T35-1220-MF	-		
	5"	1525mm	1 1/2"	39mm	ROD-THU-T35/R39/T35-1525-MF	-		
	6"	1830mm	1 1/2"	39mm	ROD-THU-T35/R39/T35-1830-MF	-		
R35	4"	1220mm	1 1/2"	39mm	ROD-THU-R35/R39/R35-1220-MF	-		
	5"	1525mm	1 1/2"	39mm	ROD-THU-R35/R39/R35-1525-MF	-		
	6"	1830mm	1 1/2"	39mm	ROD-THU-R35/R39/R35-1830-MF	-		
T38	4"	1220mm	1 1/2"	39mm	ROD-THU-T38/R39/T38-1220-MF	90510719		
	5"	1525mm	1 1/2"	39mm	ROD-THU-T38/R39/T38-1525-MF	7324-4715C-20 90510720		
	6"	1830mm	1 1/2"	39mm	ROD-THU-T38/R39/T38-1830-MF	7324-4718C-20 90510721		
T45	4"	1220mm	1 3/4"	46mm	ROD-THU-T45/R46/T45-1220-MF	7325-7712C-20		
	5"	1525mm	1 3/4"	46mm	ROD-THU-T45/R46/T45-1525-MF	90510730		
	6"	1830mm	1 3/4"	46mm	ROD-THU-T45/R46/T45-1830-MF	90510731		
T51	4"	1220mm	2"	52mm	ROD-THU-T51/R52/T51-1220-MF	7326-5518C-20 90510738		
	5"	1525mm	2"	52mm	ROD-THU-T51/R52/T51-1525-MF	90510737		
	6"	1830mm	2"	52mm	ROD-THU-T51/R52/T51-1830-MF	90510738		

GUIDE TUBES

GUIDE TUBE	Dimensions				Part Number	Compatibility		
	Length, L		Diameter					
	Imperial	Metric	Imperial	Metric				
T38	4'	1220mm	2 1/8"	56mm	GTUBE-THU-T38-1220-MF	7955-5612-20 94502648		
	5'	1525mm	2 1/8"	56mm	GTUBE-THU-T38-1525-MF	94000051		
	6'	1830mm	2 1/8"	56mm	GTUBE-THU-T38-1830-MF	7955-5618-20 94000052		
T45	4'	1220mm	2 1/2"	64mm	GTUBE-THU-T45-1220-MF	94502687		
	5'	1525mm	2 1/2"	64mm	GTUBE-THU-T45-1525-MF	94000047		
	6'	1830mm	2 1/2"	64mm	GTUBE-THU-T45-1830-MF	94000046		
T51	4'	1220mm	3"	76mm	GTUBE-THU-T51-1220-MF	90514257		
	5'	1525mm	3"	76mm	GTUBE-THU-T51-1525-MF	-		
	6'	1830mm	3"	76mm	GTUBE-THU-T51-1830-MF	7957-7618-20 94000046		

DRILL TUBES

THREAD	Dimensions				Part Number	Compatibility		
	Length		Diameter					
	Imperial	Metric	Imperial	Metric				
T45	4'	1220mm	2 1/2"	65mm	TUBE-THU-T45-1220-MF	-		
	5'	1525mm	2 1/2"	65mm	TUBE-THU-T45-1525-MF	7985-6315-26		
	6'	1830mm	2 1/2"	65mm	TUBE-THU-T45-1830-MF	7985-6318-26		
ST58	4'	1220mm	3"	76mm	TUBE-THU-ST58-1220-MF	-		
	5'	1525mm	3"	76mm	TUBE-THU-ST58-1525-MF	7378-7615-26		
	6'	1830mm	3"	76mm	TUBE-THU-ST58-1830-MF	7378-7618-26		
ST68	4'	1220mm	3 1/2"	87mm	TUBE-THU-ST68-1220-MF	-		
	5'	1525mm	3 1/2"	87mm	TUBE-THU-ST68-1525-MF	7379-8715-26		
	6'	1830mm	3 1/2"	87mm	TUBE-THU-ST68-1830-MF	7379-8718-26		

SHANK ADAPTORS

SHANK ADAPTOR	Drifter Model	Thread	Length, L	Part Number	Compatibility
	HL1000	T45	590mm	THU-SHANK-HL1000-T45/590/52	7305-6008-01
	HL1000	T51	670mm	THU-SHANK-HL1000-T51/670/52	7306-6010-02
	HL1500ST	ST58	635mm	THU-SHANK-HL1500ST-ST58	7328-6035-01
	HL1500ST	ST68	635mm	THU-SHANK-HL1500ST-ST68	7329-6035-05
	HL1560ST	ST58	635mm	THU-SHANK-HL1560ST-ST58	7328-6020-01
	HL1560ST	ST68	635mm	THU-SHANK-HL1560ST-ST68	7329-6020-05
	HL500	T38	550mm	THU-SHANK-HL500S-T38/460/45	7304-7557-01
	HL500	T45	550mm	THU-SHANK-HL500S-T45/460/45	7305-7557-01
	HL700	T45	600mm	THU-SHANK-HL710-T45/600/45	7305-7577-02
	HL700	T51	600mm	THU-SHANK-HL710-T45/600/52	7306-7577-03
	COP 1838/1532	T38	525mm	THU-SHANK-1838-T38/525/38	90516121
	COP 1838ME	T38	435mm	THU-SHANK-1838ME-T38/435/38	90516120
	COP 1838EX	T45	730mm	THU-SHANK-1838EX-T45/730/52	7305-3826-02
	COP 1838MUX+	T38	730mm	THU-SHANK-1838MUX-T38/730/52	7304-3663-01
	COP 1838MUX+	T45	730mm	THU-SHANK-1838MUX-T45/730/52	7305-3663-01
	COP 2550UX	T45	770mm	THU-SHANK-2550UX-T45/770/60	90516030
	COP 2550UX	ST58	770mm	THU-SHANK-2550UX-ST58/770/77	90516511
	COP 4050MUX	ST58	835mm	THU-SHANK-4050MUX-ST58/835/90	7328-3720-01
	COP 4050MUX	ST68	835mm	THU-SHANK-4050MUX-ST68/835/90	7329-3720-01



BIT ADAPTORS

Thread		Length, mm	Part Number	Compatibility
Female	Male			
T38	T45	230	ADAPT-THU-FT38-MT45	7334-5401
	T51	280	ADAPT-THU-FT38-MT51	-
T45	T38	220	ADAPT-THU-FT45-MT38	7335-4401
	T51	285	ADAPT-THU-FT45-MT51	7335-6401
T51	T45	225	ADAPT-THU-FT51-MT45	7336-5401
	ST58	280	ADAPT-THU-FT51-MST58	-
	ST68	280	ADAPT-THU-FT51-MST68	-
	T51	320	ADAPT-THU-FST58-MT51	-
ST58	ST68	320	ADAPT-THU-FST58-MST68	-
	T51	350	ADAPT-THU-FST68-MT51	-
ST68	ST58	350	ADAPT-THU-FST68-MST58	-

RECOVERY TOOLS


RECOVERY TOOL	Size	Dimensions						Part Number	
		D		D1		Length, L			
		Imperial	Metric	Imperial	Metric	Imperial	Metric		
Fishing Sleeve									
	R32 Round	1 59/64"	49mm	1 55/64"	47mm	11 13/16"	300mm	THU-TOOL-FSLEEVE-R32	
	R38 Round	2 23/64	60mm	-	-	1' 1 57/64"	353mm	THU-TOOL-FSLEEVE-R38	
	T35 Round	2 3/64"	52mm	1 31/32"	50mm	11 3/16"	284mm	THU-TOOL-FSLEEVE-T35	
	T38 Round	2 13/32"	61mm	2 19/64"	58mm	1' 1 57/64"	353mm	THU-TOOL-FSLEEVE-T38	
	T45 Round	2 51/64"	71mm	2 41/64"	67mm	10 53/64"	275mm	THU-TOOL-FSLEEVE-T45	
	T51 Round	3 15/64"	82mm	3 5/64"	78mm	1' 5 21/64"	440mm	THU-TOOL-FSLEEVE-T51	
	ST58 Rods	3 5/8"	92mm	3 7/16"	87mm	1' 5 23/32"	450mm	THU-TOOL-FSLEEVE-ST58	
	ST68	4 1/64"	102mm	3 37/64"	91mm	1' 3 5/32"	385mm	THU-TOOL-FSLEEVE-ST68	
Fishing Pike									
	R32 rods	49/64"	19.4mm	5/32"	4mm	11 1/32"	280mm	THU-TOOL-FPIKE-R32	
	T38 rods	49/64"	19.4mm	5/16"	8mm	9 21/64"	237mm	THU-TOOL-FPIKE-T38	
	T45 rods	1"	25mm	5/16"	8mm	10 53/64"	275mm	THU-TOOL-FPIKE-T45	
	T51 rods	1 1/16"	27mm	19/32"	15mm	11 7/32"	285mm	THU-TOOL-FPIKE-T51	
	ST58 rods	1 17/32"	39mm	53/64"	21mm	12 33/64"	318mm	THU-TOOL-FPIKE-ST58	
	ST68 rods	1 13/16"	46mm	1 7/16"	28mm	1 33/64"	318mm	THU-TOOL-FPIKE-ST68	

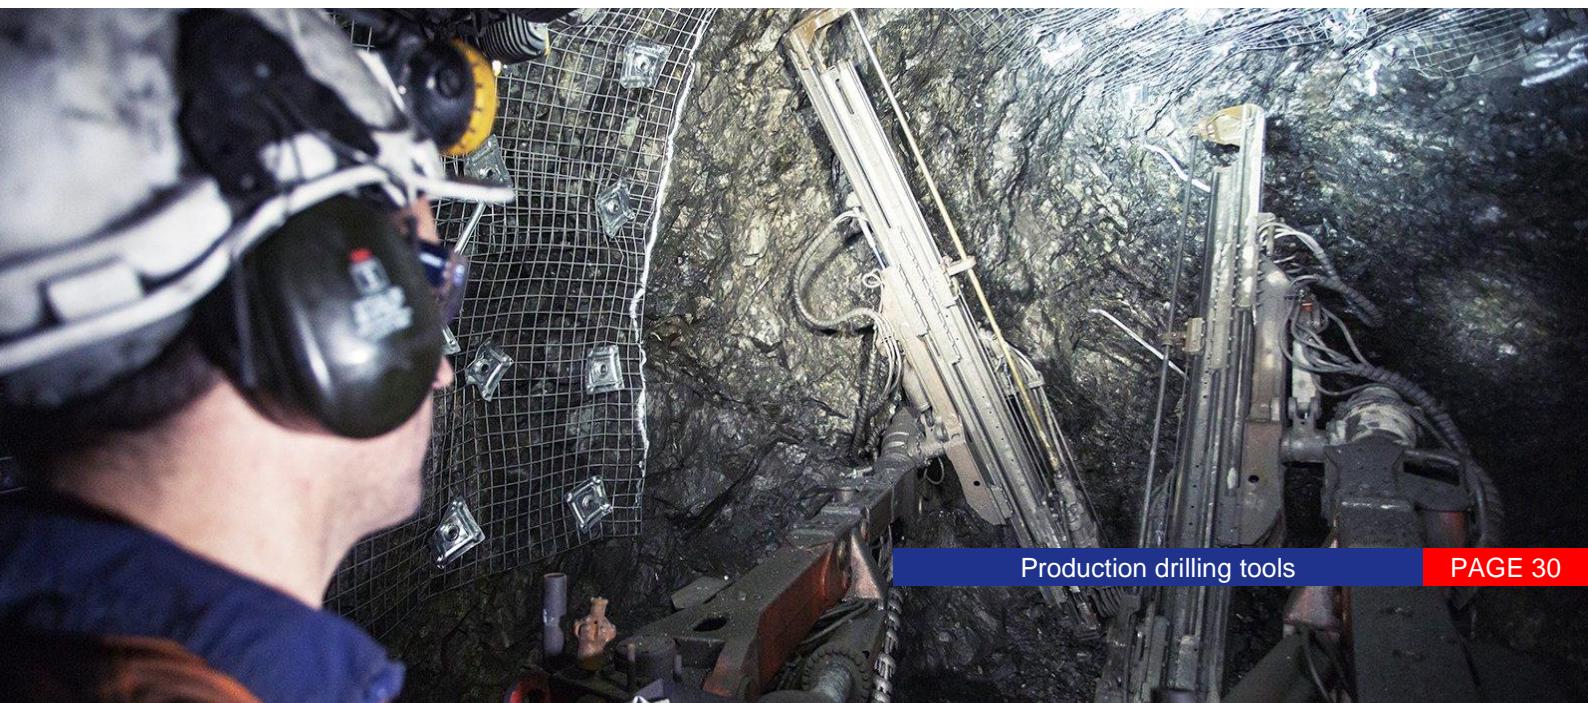
SPLIT SET DRIVING TOOLS

SPLIT SET DOLLY BARS

RODS	Diameter		Length, L		Part Number	Compatibility
	Imperial	Metric	Imperial	Metric		
	1 1/2"	39mm	19 11/16"	500mm	THU-DBAR-T38/R39/T38-MM-500	7324-4709C-20
	1 1/2"	39mm	3'	915mm	THU-DBAR-T38/R39/T38-MM-915	-
	1 1/2"	39mm	19 11/16"	500mm	THU-DBAR-T45/R39/T38-MF-500	-
	1 1/2"	39mm	3'	915mm	THU-DBAR-T45/R39/T38-MF-915	-

SPLIT SET DRIVERS

SPLIT SET DRIVER	Connection	Set Size	Diameter, D	Diameter, d	Length, L	Part Number	Compatibility
	H22x108	33mm	27.5mm	21mm	338mm	THU-TOOL-SSDRIVER-H22/33	7979-2221
	H22x108	39mm	32.5mm	26mm	318mm	THU-TOOL-SSDRIVER-H22/39	7979-2226
	T38	39mm	32.5mm	26mm	174mm	THU-TOOL-SSDRIVER-T38/39	7979-2626
	T38	46mm	36.5mm	30mm	174mm	THU-TOOL-SSDRIVER-T38/46	7979-2630
	R38	39mm	32.5mm	26mm	174mm	THU-TOOL-SSDRIVER-R38/39	7979-4526
	R38	46mm	36.5mm	30mm	174mm	THU-TOOL-SSDRIVER-R38/39	7979-4530





Air-Leg and Hand-Held Rock Drills

- Air-Leg Rock Drills _____ PAGE 32
- Hand-Held Rock Drills _____ PAGE 36



Air-leg Rock Drills

Black Diamond Drilling manufactures and supplies world class Air Leg Rock Drills. Using the latest manufacturing equipment and techniques ensures that our products are high strength and wear resistant. The result is an efficient and cost-effective drilling solution.

BD-YT28 Air-Leg Rock Drill

Product Information

The BD-YT28 Air Leg Rock Drill is a product that adopts all the latest design technology.

It is an efficient, energy saving rock drill.

The BD-YT28 Air Leg rock drill has lower noise, higher durability, faster speeds and a lower failure rate than other comparable drills.



Features Include

- Centralised operating system, flexible startup, combination of pneumatics and water, ease of use and straightforward maintenance procedures.
 - Low noise, low vibration, energy efficient, high durability and reliability.
 - A clear oiler reservoir enables easy oil level observation.

BD-YT28 Air Leg Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈57lb	≈26kg
Length	2' 2"	659mm
Cylinder Diameter	Φ 3 9/64"	Φ 80mm
Piston Stroke	2 23/64"	60mm
Air Consumption	≤ 14.5 gal/s	≤ 55 l/s
Impact Frequency	≥ 35 Hz	≥ 35 Hz
Impact Strength	≥ 46.4 ftlb	≥ 63 J
Drilling Speed	≥ 15 3/4 inch/min	≥ 400mm/min
Drilling Diameter	Φ 1 11/32" ~ 1 25/32"	Φ 34~45mm
Drilling Depth	16' 4 27/32"	5m

BD-YT29A Air-Leg Rock Drill



Product Information

The BD-YT29A Air Leg Rock Drill is a product that adopts all the latest design technology.

It is an efficient, energy saving rock drill.

The BD-YT29A Air Leg rock drill has lower noise, higher durability, faster speeds and a lower failure rate than other comparable drills.

Features Include

- Centralised operating system, flexible startup, combination of pneumatics and water, ease of use and straightforward maintenance procedures.
 - Excellent ability in washing blast holes. A clear oiler reservoir enables easy oil level observation.

Scope of Application

The BD-YT29A Air Leg Rock Drill is suitable for horizontal drilling or sloping blast hole in solid hard rock as well as vertical bolt holes in the roof. Diameter of blast holes is 35-45mm and the effective depth of the hole can reach 5m.

BD-YT29A Air Leg Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈60lb	≈27kg
Length	2' 2"	659mm
Cylinder Diameter	Φ 3 7/32"	Φ 82mm
Piston Stroke	2 23/64"	60mm
Air Consumption	≤ 17 gal/s	≤ 65 l/s
Impact Frequency	≥ 37 Hz	≥ 37 Hz
Impact Strength	≥ 51 ftlb	≥ 69 J
Drilling Speed	≥ 18 11/16 inch/min	≥ 475mm/min
Drilling Diameter	Φ 1 3/8 ~ 1 25/32"	Φ 35~45mm
Drilling Depth	16' 4 27/32"	5m

BD-YT24 Air-Leg Rock Drill



Product Information

The BD-YT24 Air Leg Rock Drill is a product that adopts all the latest design technology.

It is an efficient, energy saving rock drill.

The BD-YT24 Air Leg rock drill has lower noise, higher durability, faster speeds and a lower failure rate than other comparable drills.

Features Include

- Centralised operating system, flexible startup, combination of pneumatics and water, ease of use and straightforward maintenance procedures.
- Excellent ability in washing blast holes. A clear oiler reservoir enables easy oil level observation.

Scope of Application

The BD-YT24 Air Leg Rock Drill is suitable for horizontal drilling or sloping blast hole in medium hard or solid hard rock.

BD-YT24 Air Leg Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈53lb	≈24kg
Length	2' 2 9/16"	675mm
Cylinder Diameter	Φ 2 3/4"	Φ 70mm
Piston Stroke	2 3/4"	70mm
Air Consumption	≤ 14 gal/s	≤ 53 l/s
Impact Frequency	≥ 29 Hz	≥ 29 Hz
Impact Strength	≥ 42 ftlb	≥ 58 J
Drilling Speed	≥ 14 3/16 inch/min	≥ 360mm/min
Drilling Diameter	Φ 1 11/32 ~ 1 21/32"	Φ 34~42mm
Drilling Depth	16' 4 27/32"	5m

BD-YT23 Air-Leg Rock Drill



Product Information

The BD-YT23 Air Leg Rock Drill is a product that adopts all the latest design technology. Including combination of pneumatics and water, rapid telescopic air leg and pressure regulation. It is an efficient, energy saving rock drill. The BD-YT24 Air Leg rock drill has lower noise, higher durability, faster speeds and a lower failure rate than other comparable drills.

Features Include

- Centralised operating system, flexible startup, combination of pneumatics and water, ease of use and straightforward maintenance procedures.
 - Excellent ability in washing blast holes. A clear oiler reservoir enables easy oil level observation.

Scope of Application

The BD-YT23 Air Leg Rock Drill is mainly used in underground coal mining and earthworks. It can be used to drill horizontal or sloping blast holes on medium and hard stone and bolt holes on the roof. The diameter of blast holes is 34-42mm and the effective depth of 5m.

BD-YT23 Air Leg Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈53lb	≈24kg
Length	2' 23/32"	628mm
Cylinder Diameter	Φ 3"	Φ 76mm
Piston Stroke	2 5/32"	55mm
Air Consumption	≤ 14 gal/s	≤ 54 l/s
Impact Frequency	≥ 36 Hz	≥ 36 Hz
Impact Strength	≥ 42 ftlb	≥ 59 J
Drilling Speed	≥ 13 3/8 inch/min	≥ 340mm/min
Drilling Diameter	Φ 1 11/32 ~ 1 21/32"	Φ 34~42mm
Drilling Depth	16' 4 27/32"	5m

Hand-held Rock Drills

Black Diamond Drilling manufactures and supplies world class Hand-held Rock Drills. Using the latest manufacturing equipment and techniques ensures that our products are high strength and wear resistant. The result is an efficient and cost-effective drilling solution.

BD-YO18 Hand-held Rock Drill

Product Information

The BD-YO18 Hand-Held Rock Drill is suitable for dry drilling. It is predominantly used in drilling split holes and breaking holes on quarry and underground mine site applications. It can also be used for horizontal drilling and sloping blast hole works.



Features Include

Light weight, low air consumption, efficient to run and easy to operate. The BD-YO18 is the lightest hand-held rock drill in our range.

BD-YO18 Hand-held Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈40lb	≈18kg
Length	1' 9 11/16"	550mm
Cylinder Diameter	Φ 2 9/32"	Φ 58mm
Piston Stroke	1 31/32"	50mm
Air Consumption	≤ 6 gal/s	≤ 23 l/s
Air Pressure	0.4~0.5 MPa	0.4~0.5 MPa
Impact Frequency	≤ 23 Hz	≤ 23 Hz
Drilling Speed	≥ 4 23/32 inch/min	≥ 120mm/min
Drilling Diameter	Φ 1 11/32" ~ 1 21/32"	Φ 34~42mm
Drilling Depth	5' – 6' 6"	1.5-2m

BD-YO20 Hand-held Rock Drill



Product Information

The BD-YO20 Hand-Held Rock Drill is suitable for dry drilling. It is predominantly used in drilling split holes and breaking holes on quarry and underground mine site applications. It can also be used for horizontal drilling and sloping blast hole works.

Features Include

Light weight, low air consumption, efficient to run and easy to operate.

BD-YO20 Hand-held Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈45lb	≈20.5kg
Length	1' 10"	550mm
Cylinder Diameter	Φ 2 31/64"	Φ 63mm
Piston Stroke	2 11/64"	55mm
Air Consumption	≤ 6 gal/s	≤ 23 l/s
Air Pressure	0.4~0.5 MPa	0.4~0.5 MPa
Impact Frequency	≤ 33 Hz	≤ 33 Hz
Drilling Speed	≥ 5 29/32 inch/min	≥ 120mm/min
Drilling Diameter	Φ 1 11/32" ~ 1 21/32"	Φ 34~42mm
Drilling Depth	9' 10 7/64"	3m

BD-Y24 Hand-held Rock Drill



Product Information

The BD-Y24 Hand-Held Rock Drill is suitable for dry drilling. It is predominantly used in drilling split holes and breaking holes on quarry and underground mine site applications. It can also be used for horizontal drilling and sloping blast hole works.

Features Include

Light weight, low air consumption, efficient to run and easy to operate. The BD-Y24 Hand Held Rock Drill is a mid range drill that is suitable for most applications.

BD-Y24 Hand-held Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈50lb	≈23kg
Length	1' 11 13/16"	605mm
Cylinder Diameter	Φ 2 3/4"	Φ 70mm
Piston Stroke	2 3/4"	70mm
Air Consumption	≤ 12 gal/s	≤ 50 l/s
Air Pressure	0.4~0.63 MPa	0.4~0.63 MPa
Impact Frequency	≤ 28 Hz	≤ 28 Hz
Drilling Speed	≥ 12 19/32 inch/min	≥ 320mm/min
Drilling Diameter	Φ 1 11/32" ~ 1 21/32"	Φ 34~42mm
Drilling Depth	16' 4 55/64"	5m

BD-Y28 Hand-held Rock Drill



Product Information

The BD-Y28 Hand-Held Rock Drill is suitable for dry drilling. It is predominantly used in drilling split holes and breaking holes on quarry and underground mine site applications. It can also be used for horizontal drilling and sloping blast hole works.

Features Include

Light weight, low air consumption, efficient to run and easy to operate. The BD-Y28 Hand Held Rock Drill is the most powerful hand-held drill that is suitable for heavier applications.

BD-Y28 Hand-held Rock Drill Parameters

Parameter	Imperial	Metric
Shank (hex x Length)	7/8" x 4 1/4"	22mm x 108mm
Weight	≈55lb	≈23kg
Length	2' 2"	659mm
Cylinder Diameter	Φ 3 9/64"	Φ 80mm
Piston Stroke	2 23/64"	60mm
Air Consumption	≤ 14.5 gal/s	≤ 55 l/s
Air Pressure	0.4~0.63 MPa	0.4~0.63 MPa
Impact Frequency	≤ 35 Hz	≤ 35 Hz
Drilling Speed	≥ 15 3/4 inch/min	≥ 400mm/min
Drilling Diameter	Φ 1 11/32" ~ 1 49/64"	Φ 34~45mm
Drilling Depth	16' 4 55/64"	5m

Black Diamond Drilling can custom manufacture equipment to suit your drilling needs.

Please contact one of our representatives to discuss your equipment needs.



BD Drill

Black Diamond Drilling Services Australia Pty Ltd



WA Headquarters: 52 Distinction Road, Wangara WA 6065

Tel: +61-08-6365-6550 **Email:** sales@bddrill.com.au **Web:** www.bddrill.com.au

Kalgoorlie-Boulder: 2 Brooks Way, Kalgoorlie, WA, 6430

Tel: +61-08-9021-8478 **Email:** admngf@bddrill.com.au **Web:** www.bddrillgf.com.au

Black Diamond Drilling Tools Canada Inc.



Sudbury Headquarters: 1899 Lassalle Blvd, unit 6, Sudbury, On, Canada, P3A-2A3

Tel: +1-705-560-5888 **Email:** sales@bddrill.ca **Web:** www.bddrill.ca

Black Diamond Drilling Tools USA LLC.



New Hampshire Headquarters: 131 Daniel Webster Hwy, #426 Nashua, NH 03060

Tel: +1-978-319-8000 **Email:** sales@bddrill.com **Web:** www.bddrill.us

Black Diamond Mongolia Ops (TD Equipment)



Ulan Bator Headquarters: Maison Centre 403, Beijing Street,

Sukhbaatar District, Ulaanbaatar, Mongolia

Tel: +976-7773-1333 **Email:** support@tdequipment.mn

Version 1.3

© Black Diamond Drilling Services Australia Pty. Ltd. 2025-04

Legal Notice: All trademarks and logos appearing in this material are owned by BDDrill Group of companies, unless specifically indicated.